



FLEXTRACE® CW 44BE4

Parallel constant wattage heating cables

Product advantages

- Maximum maintenance temperature +70°C
- Cut at length
- Uniform thermal output
- No inrush current compare to self reg
- No need to oversized panel board
- Low cost alternative to high temp constant wattage cable

Applications:


FLEXTRACE® CW 44BE4 parallel constant wattage heating cables are engineered to provide freeze protection and process-temperature maintenance for piping, tanks, or defreezing industry process and commercial equipment. The parallel heating cores produce a uniform thermal output over its entire length, using one a single power point and allowing the cable to be cut to length and terminated on site.

FLEXTRACE® CW 44BE4 cables ensure fast installation without compromising performance.

Field of usage

- Min/Max temperature exposure power off: -20°C up to +105°C
 - List of power - Voltage list: 2-4-8 W/ft - 230 Volts
 - Metal or nonmetal surface contact
 - Non hazardous area
- Outer jacket standard colour: Black (*other colour on demand*)

Approvals - standards

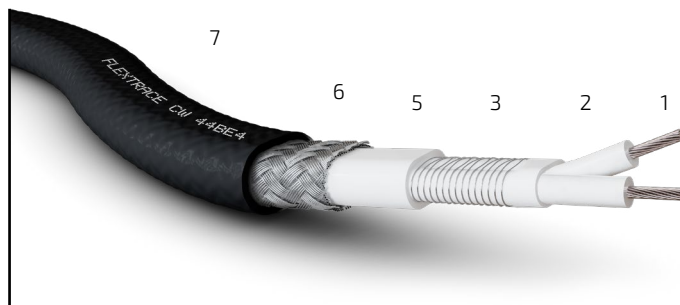

Construction

- 1 • Nickel plated copper bus AWG12
- 2 • TPE insulation and jacket
- 3 • Alloy wire
- 4 • Skiving not shown
- 5 • TPE Insulation
- 6 • Metal braid
- 7 • TPE outer jacket

PART NUMBER	REFERENCE	POWER	VOLTAGE	ZONE LENGTH	CURRENT
		W/ft	Volt	Inches	Amps/ft
	CW 44BE4 2-1	2	120	36	0.017
		1.7	208	48	0.008
	CW 44BE4 2-2	2	230	48	0.009
		2.9	277	48	0.010
	CW 44BE4 4-1	4	120	36	0.033
		3.3	208	48	0.016
	CW 44BE4 4-2	4	230	48	0.020
		5.8	277	48	0.021
	CW 44BE4 8-1	8	120	24	0.067
		6.5	208	36	0.031
	CW 44BE4 8-2	8	230	36	0.033

TRACING PARAMETERS				
SIZE	WEIGHT	BENDING RADIUS	MAX TEMP MAINTENANCE	CIRCUIT LENGTH
l x h	lbs/10ft	Inches	°C	ft
.257" x .368"	0.6	1 1/4"	70	504
.257" x .368"	0.6	1 1/4"	70	1027
.257" x .368"	0.6	1 1/4"	70	1008
.257" x .368"	0.6	1 1/4"	60	802
.257" x .368"	0.6	1 1/4"	50	399
.257" x .368"	0.6	1 1/4"	50	838
.257" x .368"	0.6	1 1/4"	50	798
.257" x .368"	0.6	1 1/4"	40	635
.257" x .368"	0.6	1 1/4"	30	300
.257" x .368"	0.6	1 1/4"	40	640
.257" x .368"	0.6	1 1/4"	30	600



OMERIN USA, Inc. QS Technologies division
 95 Research Parkway, Meriden,
 Connecticut 06450
 Phone: 203-237-2297
 qstech@omerin.com

www.omerin.com

* Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN. The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.